

technical data sheet






EN

Product specifications

| | | |
|-----------------------|-----------------------|---|
| 3-layer wood flooring | EN 14342 (Free Class) | DOP PQ2021-1 |
| Dimensions | Plank | 600-1900 x 150 x 14/ 3 mm |
| | Box | 8 planks / 2,28 m ² / 17,80 kg |
| | Nested lengths | 6 full planks |
| Installation | Pallet | 48 boxen / 109,44 m ² / 860 kg |
| | Density | EN ISO 23996 |
| Installation | ISO 24334 | Dropclick (floathing or glued) |
| Top layer | | 3 mm European oak (Quercus Robur) |
| Grading | | Rustical AB |
| Surface | | Lightly brushed |
| Bevel | | 4-sided bevel |
| Gloss level | 60° | 5-9% |
| Finishing | | Oil |
| Warranty conditions | Residential use | 20 years |
| | Commercial use | upon request |
| Application | EN 14342 | Class 23 |



Product properties

| Property | Test method | min. req. | result |
|---------------------------|--|-----------------------------|---|
| Indoor air certifications | | | A, REACH |
| Fire resistance |  EN 13501-1 | | Dfl-S1 |
| Slip resistance |  EN 13893 | | DS (≥ 0.30) |
| Formaldehyde emission |  EN 717-1 | ≤ 0.124 mg/m ³ | E1 |
| Pentachlorofenol content |  EN 12673 | < 5 ppm | < detectable limit |
| Underfloor heating |  EN 12667 | R < 0.15 m ² K/W | R = 0,12 m ² K/W OK (max +28°C) + glued |
| Biological durability | | | Class 1 |

Cleaning and maintenance instructions: www.lamett.eu




Rustic AB

EN

Grading description

| | |
|-------------------|--|
| Texture | Slightly brushed |
| Grading | Rustic |
| Colour variation | Medium |
| Sound knots | Allowed unlimited, $\varnothing < 30\text{mm}$ |
| Unsound knots | ≤ 3 per plank; $\varnothing < 20\text{ mm}$ |
| Bark | ≤ 3 per plank; $< 3\text{mm}$ width, $< 10\text{mm}$ length |
| Sapwood | $< 20\%$ of the width |
| End crack | Partially filled; $< 3\text{mm}$ wide, $< 100\text{mm}$ long |
| Surface crack | Allowed limited; $< 5\text{mm}$ wide, partially filled |
| Insect hole | Allowed limited; $< 2\text{mm}$ wide; 8/400, partially filled |
| Decay | Not allowed |
| Blue/yellow stain | Not allowed |
| Sound heart | Not allowed |
| Machine marks | Not allowed |

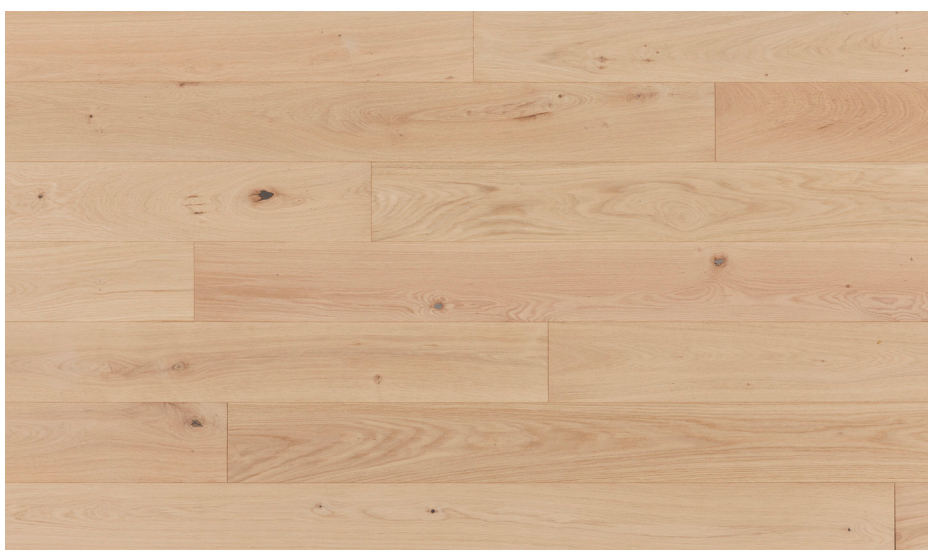

This picture is an indication of the grading as described.

Grading description — 2 criteria

Knots

Scale from (rigid) parquet without knots up to planks with more and larger knots



Colour variation

From little colour variation/sapwood to bigger colour variation/sapwood

